


TLC-1 WALL PANEL

**Condensed
Technical
Reference**

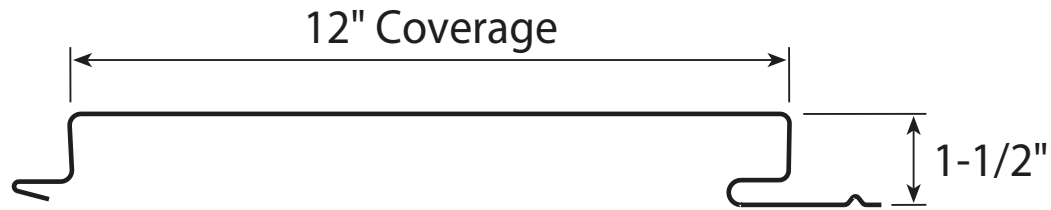

**ARCHITECTURAL
COMMERCIAL
INDUSTRIAL
PANEL**

**CONCEALED
FASTENED**


**12"
COVERAGE**

**SOFFIT, FASCIA,
WALL AND LINER
PANEL**

**OPEN FRAMING OR
SOLID SUBSTRATE**

PANEL OVERVIEW

- ▶ Finish: Standard: PVDF
Optional: multi-pass PVDF
- ▶ Corrosion Protection: AZ50 per ASTM A 792 for painted Galvalume®
G90 per ASTM A 653 for Galvanized
- ▶ Gauges: 24 ga, 22 ga and 20 ga
- ▶ 12" panel coverage, 1 1/2" panel height
- ▶ Flush face, concealed fastened, non-end lapping panel system
- ▶ Roll-Formed Panels
- ▶ Panel Length: 5' minimum, 40' maximum
- ▶ Panels can be installed horizontally or vertically
- ▶ Panels cannot be endlapped
- ▶ Optional material availability: Stainless Steel, Copper and Aluminum
- ▶ Panels can be installed horizontally or vertically and are interchangeable for accent effects
- ▶ Use on single-skin or field-assembled wall systems

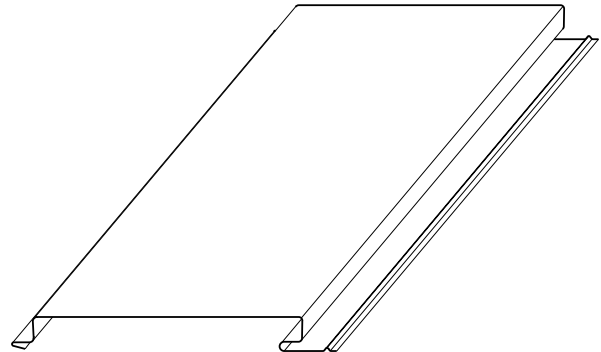

TESTING AND APPROVALS


- ▶ ASTM E 283 Air Leakage
- ▶ ASTM E 331 Water Penetration
- ▶ ASTM E 330 Uniform Static Air Pressure Difference
- ▶ ASTM E 1592 Load Test

MS Metal Sales™

TLC-1 WALL PANEL


**Condensed
Technical
Reference**

FASTENING PATTERN

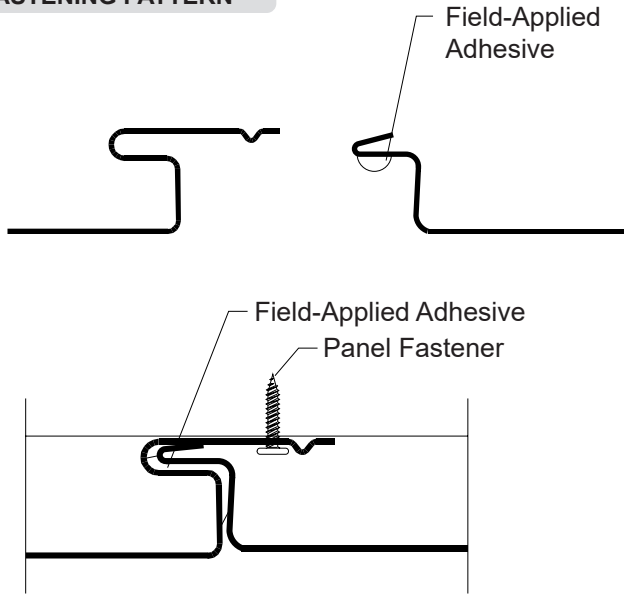


DIRECTIONAL DETAILS

Left to Right Installation



Right to Left Installation



FASTENING INFORMATION

Overdriven fasteners will cause panel distortions.

Fasteners should extend 1/2" or more past the inside face of the support material.

Thick Panels (ex. 20 ga) or supports (ex. 1/2" steel) may require predrilling of holes for screws.

Panel Fasteners:

Attaching to Wood:

#10-12 Pancake Head Wood Screw

Attaching to Steel:

<18 ga: 1/4"-13 Deck Screw

>=18 ga, <=12 ga: #10-16 Pancake Head Driller

Trim Fasteners:

1/4"-14 x 7/8" XL Stitch Screw

1/8" x 3/16" Pop Rivet

Field-Applied Adhesive:

1/4" diameter bead of Geocel 4600

Vertical panels may be installed left-to-right or right-to-left.

Horizontal panels are installed from top to bottom.

SECTION PROPERTIES

ALLOWABLE UNIFORM LOADS, psf For various fastener spacings

Ga	Width in	Yield ksi	Weight psf	Top In Compression		Bottom In Compression		Inward Load						Outward Load					
				Ixx	Sxx	Ixx	Sxx												
				in ⁴ /ft	in ³ /ft	in ⁴ /ft	in ³ /ft	2'	3'	4'	5'	6'	8'	2'	3'	4'	5'	6'	8'
24	12	50	1.48	0.0609	0.0616	0.1317	0.1123	50	33	25	20	19	18	80	53	40	32	27	25
22	12	50	1.93	0.0880	0.0923	0.1840	0.1593	63	42	31	29	27	25	88	58	44	35	32	30
20	12	33	2.35	0.1260	0.1421	0.2460	0.2177	63	42	31	29	27	25	88	58	44	35	32	30

- Theoretical section properties have been calculated per AISI S100-2016 'North American Specification for the Design of Cold-Formed Steel Structural Members'. Ixx and Sxx are effective section properties for deflection and bending.
- Allowable load is calculated in accordance with AISI 2016 specifications considering bending, shear, combined bending & shear, deflection and ASTM E 330 testing on 16 ga girts. Allowable load considers the 3 or more equal spans condition. Allowable load does not address web crippling, fasteners, support material or load testing with other supports. Panel weight is not considered.
- Deflection consideration is limited by a maximum deflection ratio of L/180 of span.
- Allowable loads do not include a 1/3 stress increase for wind.

©MSMC/1-2026

MS Metal Sales™

Anchorage, AK 866.640.7663
Bay City, MI 888.777.7640
Deer Lake, PA 800.544.2577
Denver, CO 800.289.7663

Detroit Lakes, MN 888.594.1394
Fontana, CA 800.782.7953
Fort Smith, AR 877.452.3915
Independence, MO 800.747.0012

metalsales.us.com

Jacksonville, FL 800.394.4419
Kelso, WA 800.431.3470
Rock Island, IL 800.747.1206
Rogers, MN 800.328.9316

Sellersburg, IN 800.999.7777
Sioux Falls, SD 888.299.0024
Spokane, WA 800.572.6565
Temple, TX 800.543.4415
Woodland, CA 800.759.6019